


BFSL Compact Sintered Bronze Silencer

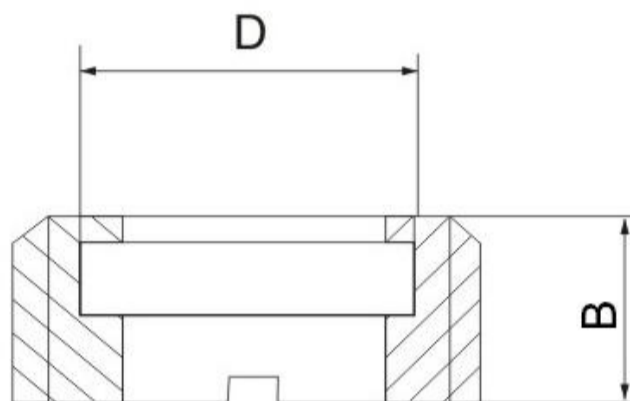

Body(noise absorbing material): Sintered bronze
Base(thread): Brass

Working Pressure: 0—1.0MPa | 0—150psi

Proof Pressure: 3.0Mpa | 435psi

Negative Pressure: -100Kpa | -29.5 In Hg

Working Temperature: -25°C—80°C | -13°F—176°F

PART NO.	Sound Pressure Level*	R	D(mm)	B(mm)
BFSL 01	81	R1/8	6	5
BFSL 02	85	R1/4	8	6
BFSL 03	80	R3/8	10	7
BFSL 04	87	R1/2	15	8
BFSL 06	84	R3/4	20	9
BFSL 08	86	R1	26	10
BFSL G01	81	G1/8	6	5
BFSL G02	85	G1/4	8	6
BFSL G03	80	G3/8	10	7
BFSL G04	87	G1/2	15	8
BFSL G06	84	G3/4	20	9
BFSL G08	86	G1	26	10
BFSL N01	81	1/8NPT	6	5
BFSL N02	85	1/4NPT	8	6
BFSL N03	80	3/8NPT	10	7
BFSL N04	87	1/2NPT	15	8
BFSL N06	84	3/4NPT	20	9
BFSL N08	86	1NPT	26	10
BFSL M8 x 1	81	M8 x 1	6	5
BFSL M8 x 1.25	81	M8 x 1.25	6	5
BFSL M10 x 1	81	M10 x 1	6	5
BFSL M10 x 1.25	81	M10 x 1.25	6	5
BFSL M12 x 1.25	85	M12 x 1.25	8	6
BFSL M14 x 1.5	85	M14 x 1.5	8	6
BFSL M16 x 1.5	80	M16 x 1.5	10	7
BFSL M20 x 1.5	87	M20 x 1.5	15	8

* Sound pressure level measured at 6 bar at 1 m distance.

** Information contained herein may be changed without prior notification.