


PSL Porous Plastic Muffler

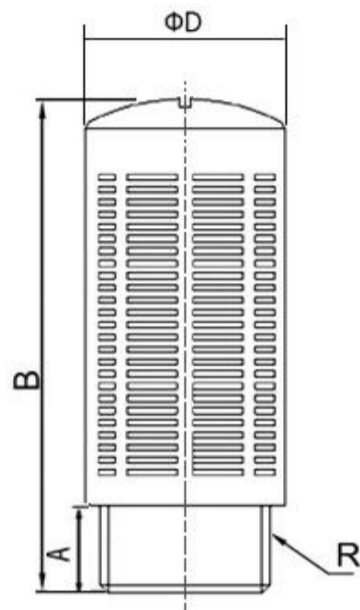

Body(noise absorbing material): Granulated Acetal Resin
Base(thread): Acetal Plastic

Working Pressure: 0—1.0MPa | 0—150psi

Proof Pressure: 3.0Mpa | 435psi

Negative Pressure: -100Kpa | -29.5 In Hg

Working Temperature: -10°C~60°C | 14°F~140°F

PART NO.	Sound Pressure Level*	R	A(mm)	B(mm)	D(mm)
PSL 01	78	R1/8	7	32	16
PSL 02	80	R1/4	8	42	20
PSL 03	85	R3/8	10	55.5	24
PSL 04	88	R1/2	10	56	24
PSL 06	90	R3/4	17	134	48
PSL 08	95	R1	17	134	48
PSL G01	78	G1/8	7	32	16
PSL G02	80	G1/4	8	42	20
PSL G03	85	G3/8	10	55.5	24
PSL G04	88	G1/2	10	56	24
PSL G06	90	G3/4	17	134	48
PSL G08	95	G1	17	134	48
PSL N01	78	1/8NPT	7	32	16
PSL N02	80	1/4NPT	8	42	20
PSL N03	85	3/8NPT	10	55.5	24
PSL N04	88	1/2NPT	10	56	24
PSL N06	90	3/4NPT	17	134	48
PSL N08	95	1NPT	17	134	48

* Sound pressure level measured at 6 bar at 1 m distance.

** Information contained herein may be changed without prior notification.